

## Visual Merchandising LED Display Solution

Bring the power of product promotion and advertising right to the store floor and next to your customers with i5LED's podium displays.

- Square or cylinder LED podiums
- Fine & ultra fine pitch solutions (1.5mm, 2.5mm and 3.0mm pitches available)
- Easy installation (you provide the power receptacles)
- Works with standard 110V power (110-240VAC supported)



ICON  
SERIES



# PODIUMView™

INTERIOR LED PRODUCTS

## PLUG & PLAY

Easy to use; works as a stand alone display or in a series of multiple display units.

## BRIGHT & VIVID CONTENT

1,000+ nits provides bright and vivid images that stand out.


## HIGH REFRESH RATE

3,840 HZ refresh rate for flicker-free and smooth content playback.



# PODIUMView™

## TECHNICAL SPECIFICATIONS

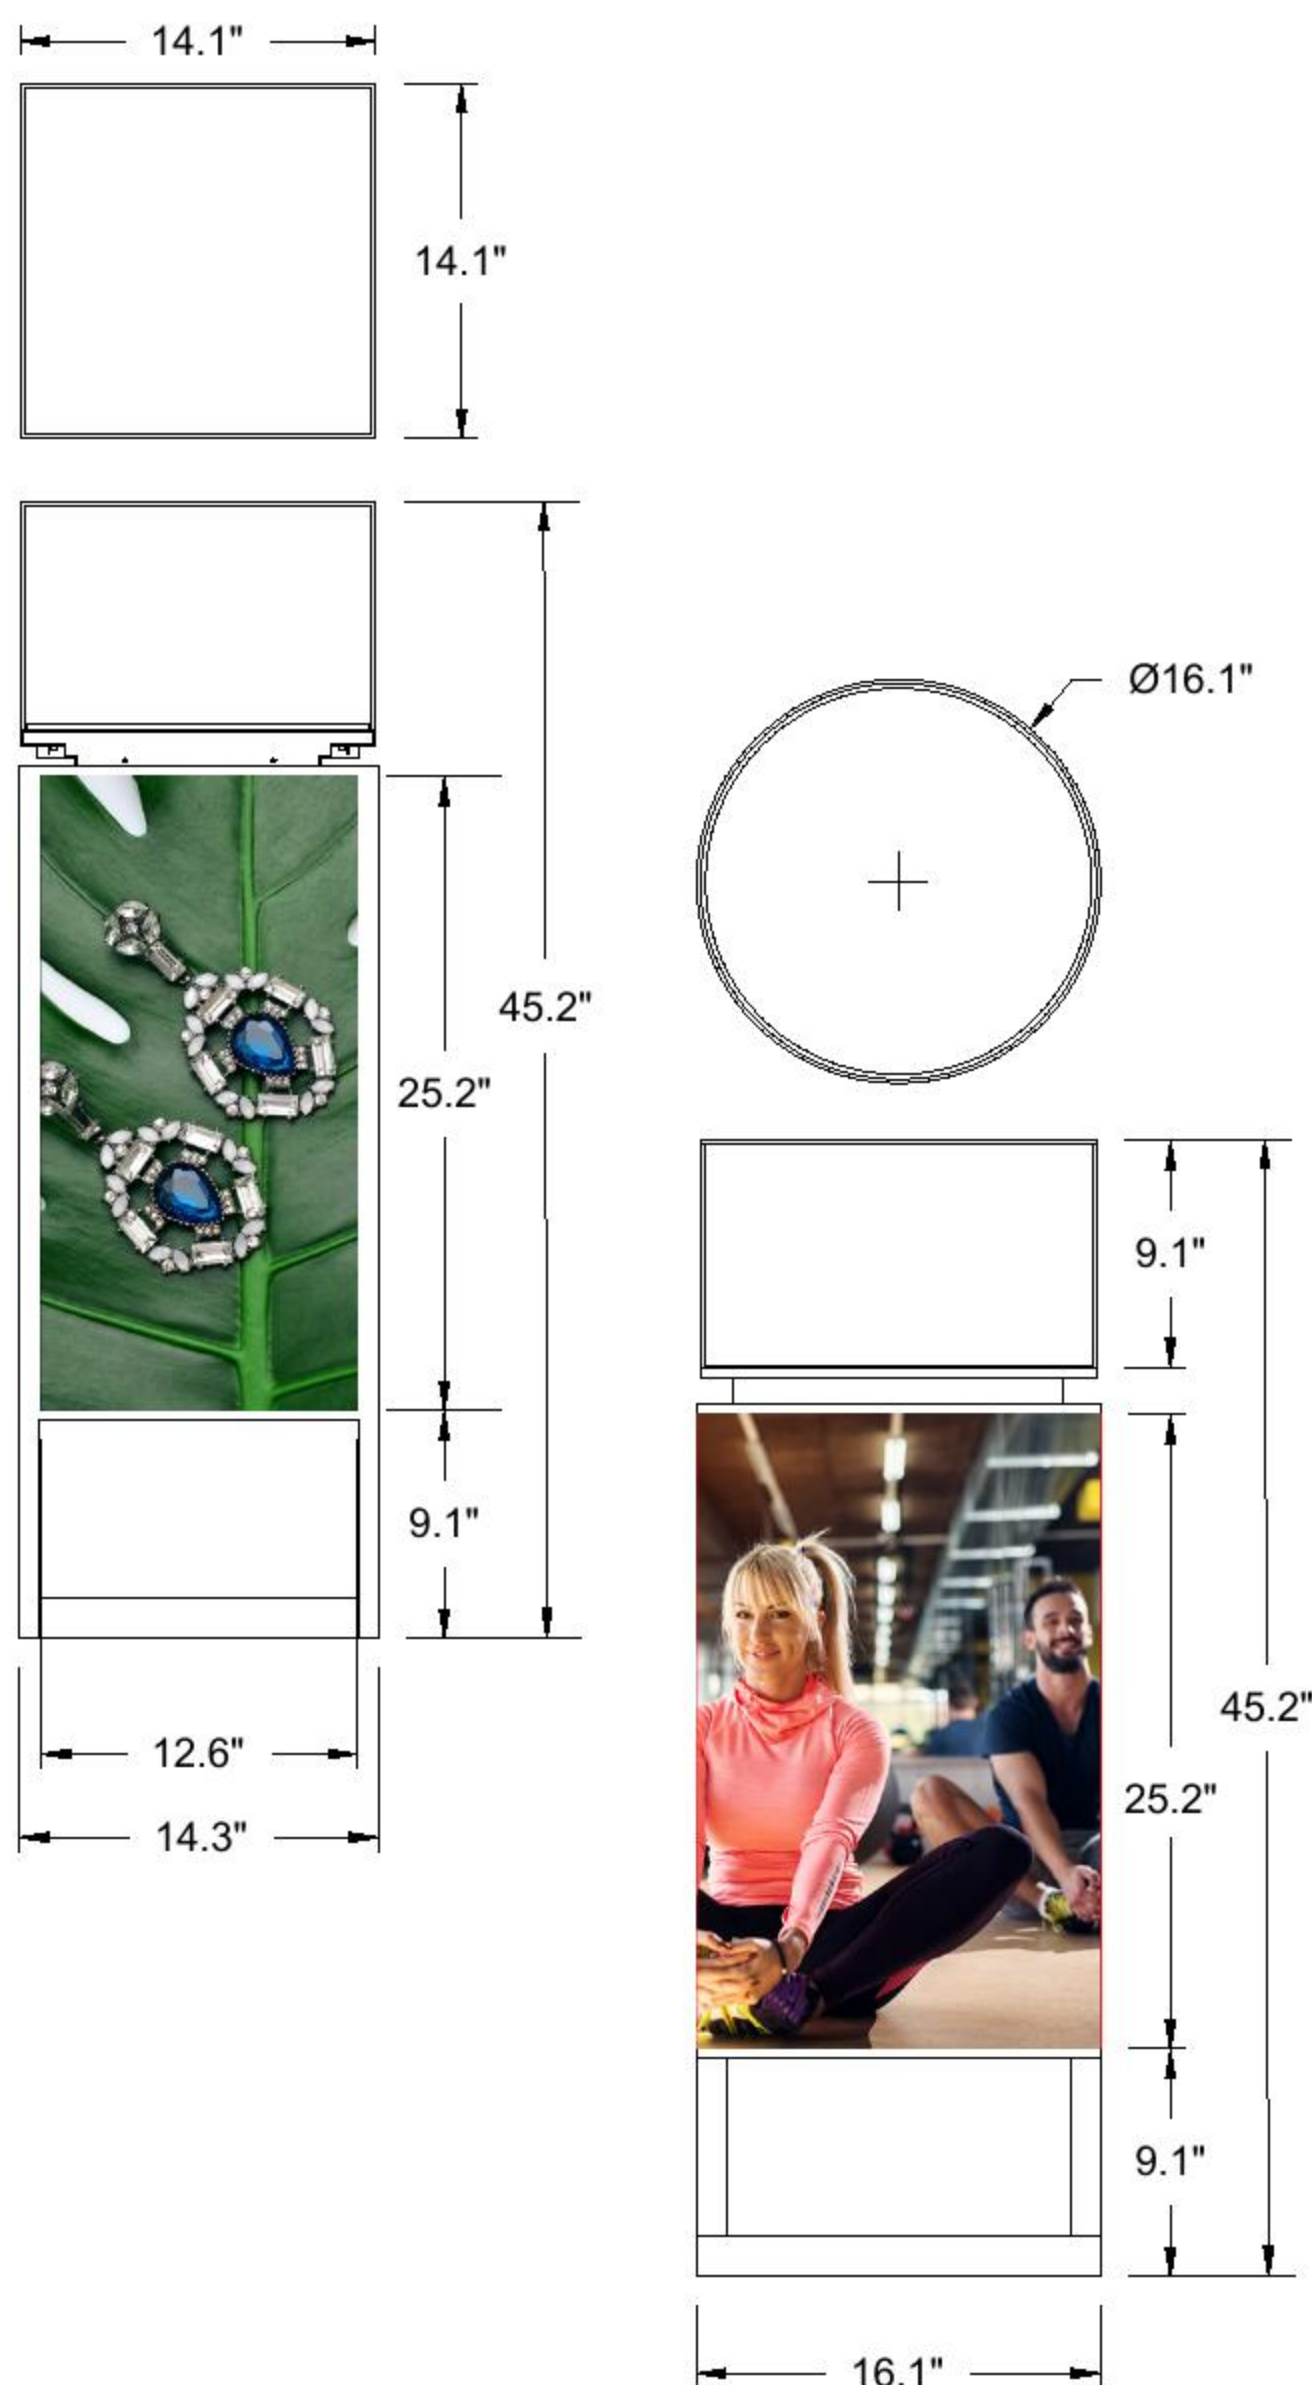

### Square

### Cylinder

1.5mm LED

2.5mm LED

3.0mm LED

1.5mm LED

2.5mm LED

PRODUCT NAME	iPV-SQ-1.5	iPV-SQ-2.5	iPV-SQ-3.0	iPV-CY-1.5	iPV-CY-2.5
PODIUM SIZE	14.3" (363mm) x 14.3" (363mm) x 45.2" (1,148mm)			16.1" (408mm) Ø x 45.2" (1,148mm)	
PIXEL PITCH	1.5 mm	2.5 mm	3.0mm HB	1.5 mm	2.5 mm
LED TYPE	SMD1212 3in1 (Black Face)	SMD2020 3in1 (Black Face)	SMD1921 3in1 (Black Face)	SMD1212 3in1 (Black Face)	SMD2020 3in1 (Black Face)
BRIGHTNESS	1,000 Nits	1,000 Nits	3,500 Nits	1,000 Nits	1,000 Nits
RESOLUTION (W x H) PER FACE	208 x 416	128 x 256	104 x 208	N/A	N/A
RESOLUTION (W x H) PER PODIUM	832 x 416	512 x 256	416 x 208	832 x 416	512 x 256
REFRESH RATE	3,840 Hz				
COLOR DEPTH	16 Bit				
COLOR TEMPERATURE	281 Trillions				
POWER	110-240 VAC, 50/60 Hz				
MAXIMUM POWER	440 W	440 W	640 W	440 W	440 W
TYPICAL POWER CONSUMPTION	147 W	147 W	214 W	147 W	147 W
VIEWING ANGLE HORIZONTAL	150°				
VIEWING ANGLE VERTICAL	140°				
CABINET MATERIAL	Steel				
SERVICE ACCESS	Front Access				
WEIGHT	66 Lbs (30 Kg)				
OPERATING TEMPERATURE	14° to 104° F (-10° to 40° C)				
STORAGE TEMPERATURE	-4° to 122°F (-20° to 50° C) / 10 to 85% RH				
CERTIFICATION	CE / EMC / RoHS				
ENVIRONMENTAL RATING	IP44				



SCAN ME